




This compact plug-in isolator isolates between inputs and outputs from each other without power supply.

Features

- Dielectric strength of 2000 V AC between input and output
- This compact and tightly mountable isolator allows the user to downsize the system.
- No power supply permits placement almost anywhere.
- Accuracy: $\pm 0.1\%$, Response time: 25 ms
- Shortened time of completion and high serviceability thanks to plug-in design

Model name

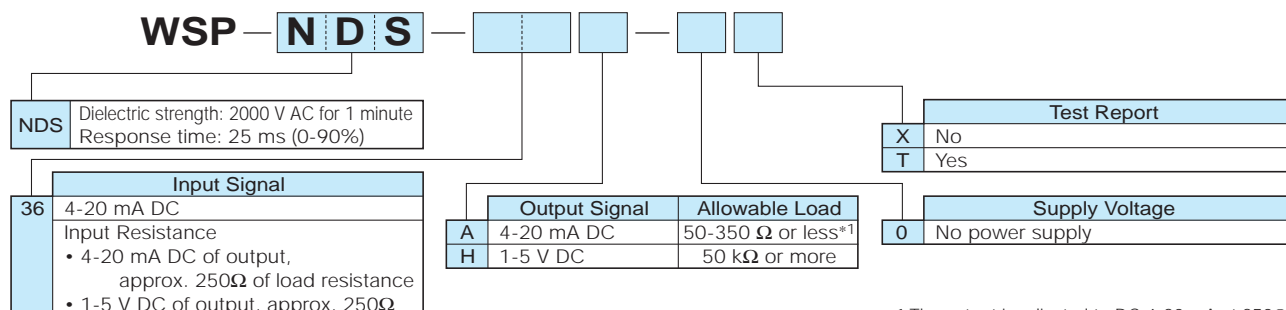


*1 The output is adjusted to DC 4-20 mA at 250 Ω before shipment. It is required to adjust the span depending on the load.

Specifications

Accuracy:	$\pm 0.1\%$ fs (at 23°C)
Response time:	25 ms (time required to reach 90% of final value)
Allowable load:	Voltage output: Load resistance 50 k Ω or more Current output: 50-350 Ω , 250 Ω before shipment
Zero & span adjustment:	$\pm 5\%$ fs (3-turn trimmer)
Operating temperature and humidity:	-5 to +55°C, 90% RH or less (without condensation)
Influence of ambient temperature:	For 10°C of temperature fluctuation, Voltage output: $\pm 0.15\%$ fs Current output: $\pm 0.2\%$ fs
Isolation:	Between input and output terminals
Insulation resistance:	100 M Ω or more with a 500 V DC megger Between input and output terminals
Dielectric strength:	2000 V AC for 1 minute between input and output terminals
Dimensions:	84(H)x23(W)x106.5(D)mm
Weight:	Approx. 150g
Structure:	Plug-in (consisting of main unit and socket part)
Connection part:	M3 SEMS screw part of the base socket
Material of terminal screw:	Chromated iron
Case color and material:	Ivory, heat-resistant ABS resin (94V-0)
Mounting:	DIN rail or wall surface
Dimensions:	Refer to Dimensional Drawing I

Terminal arrangement:



No.	Symbol	Description
1	No.1 +	No.1 Input Signal
4	INPUT -	
5	NC	No Connection
8	NC	No Connection
9	No.1 +	No.1 Output Signal
12	OUTPUT -	
13	NC	No Connection
14	NC	No Connection