


Model code

WS-

Code	Rated Primary Current (DC)	Rated Secondary Voltage (DC)	Accuracy
250	±250A	±60mV	± 1.0%
300	±300A		
400	±400A		
500	±500A		
600	±600A		
750	±750A		

Dimensions

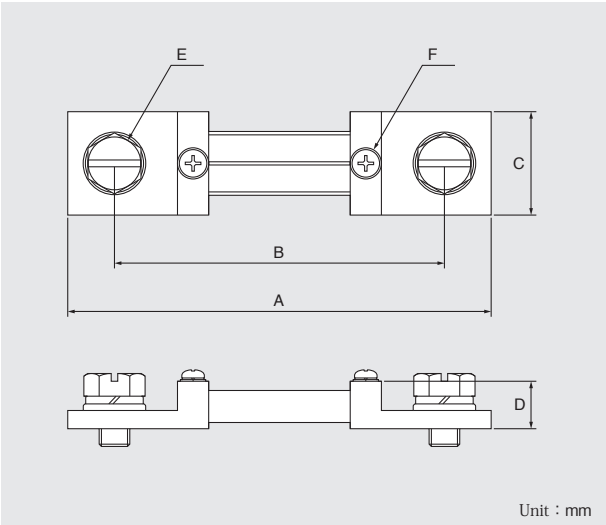

Rated Primary Current	Dimensions					
	A	B	C	D	E	F
250A	135	105	33	15	M10	M5
300A	135	105	38	15	M12	M5
400A	155	115	45	20	M12	M5
500~750A	175	130	45	30	M12	M5