



This compact plug-in type converter (isolator) provides signal output which is mutually isolated between input, output and power-supply. It amplifies and converts various kinds of signal with isolation to use in the integrated instrumental control system. It is highly effective as noise countermeasures.

Features

- ★ Fine zero & span adjustment by 15 turn trimmer
- ★ Zero & span adjustment $\pm 10\%$ full scale
- ★ Safe design by dielectric strength of 3000Vac
- ★ Compatible with 30Vdc power supply voltage
- ★ 5 years warranty, long life
- ★ CE approved

Ordering code

WSPF- **IS** - [] - [] - []

Code	Input	Input Resistance
14	1 to 5Vdc	1M Ω
15	0 to 10Vdc	1M Ω
36	4 to 20mAcd	50 Ω

Code	Output	Allowable Load Resistance
A	4 to 20mAcd	750 Ω or less
H	1 to 5Vdc	1k Ω or more
P	0 to 10Vdc	2k Ω or more

Code	Power Supply
A	100 to 240Vac $\pm 10\%$ 50/60Hz
D	24Vdc $\pm 10\%$
*1	10.8 to 30Vdc
8	110Vdc $\pm 10\%$

Code	Test Report
X	None
T	With Test report

*1...CE approval do not adapt when power supply is 10.8Vdc to 30Vdc.

Specifications


Input signal	DC current / voltage
Output signal	DC current / voltage
Accuracy	$\pm 0.1\%$ FS (at 23°C)
Response time	Approx. 25ms (0 to 90%)
Allowable load	Current output 15V or less of voltage drop between output terminal Voltage output Load current 5mA or less *1 μ A or less if the output is less than 1V FS
Zero & span adjustment	$\pm 10\%$ FS (15 turn trimmer)
Operating temperature range	-5 to +55°C
Operating relative humidity	90% or less (Non-condensing)
Storage temperature range	-10 to +60°C
Temperature coefficient	$\pm 0.015\%$ of span per °C
Isolation	Between input, output, and power supply
Insulation resistance	100M Ω or more with 500Vdc megger Between input, output, and power supply terminal
Dielectric strength	3000Vac for 1 minute between power supply and input/output terminal, 2000Vac for 1 minute between input and output terminal
Power consumption	Approx. 4.5VA (AC), Approx. 60mA (DC)
Power supply variation	$\pm 0.1\%$ FS (within the range of rated voltage)
Dimensions	84(H) X 23(W) X 106.5(D)mm
Weight	Approx. 130g
Structure	Plug-in (Body part and socket part)
Connection	M3 SEMS screw part of the base socket (Tightening torque 0.6N-m)
Mounting	DIN rail or wall surface
Case color and material	Ivory, ABS resin, flame retardant grade UL94V-0
EMC directive	EN61326-1, EN61010-1, EN IEC 63000 Installation category : II, Pollution degree : 2
Rated altitude	2000m or less

Terminal connections



No	Symbol	Description
1	INPUT +	Input
4	-	
5	NC	No connection
8	NC	No connection
9	OUTPUT +	Output
12	-	
13	POWER U(+)	Power Supply
14	V(-)	

Dimensions

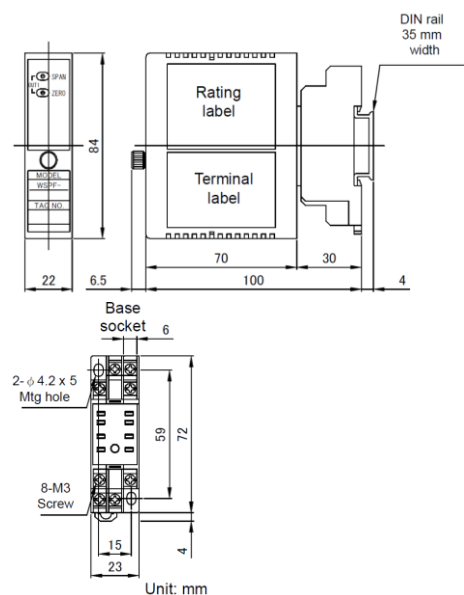

* Specification is subject to change without notice